AyrKing Corporation Breader/Blender/Sifter

AyrKing offers a manual breading workstation with integrated automatic Blender/Sifter machine. Rotary brush sifter operates without detrimental vibration or agitation. Spirally configured nylon bristles form an auger to eject unwanted dough balls to a waste container. Ingredients are fully blended as brush tumbles breading media before it exits through sifter screen. Unique process prevents dough ball grinding, eliminates usual sifting noise, & blends ingredients as it ejects waste.



Photo of BBS-U-4830

ADVANTAGES

Sift and blend 30 lbs (14 kg) of breading in 60 seconds!

Rotary auger brush blends, sifts, and ejects dough balls simultaneously

Blending brush action prevents ingredient segregation, unlike vibrating or agitating systems Quiet, vibration-free operation creates results, not disturbances

Sixty second timed cycle frees labor and saves energy

Raised s/s lip around sifter opening prevents tabletop spills from contaminating sifted breading Fully enclosed sifter with only four internal parts, reduces dust and allows quick and easy cleaning Direct drive, steel geared motor & solid stainless steel fabrication provide lasting performance

MODELS

BBS-U-483048"L by 30"W table with 2"H rear tabletop backsplash (1219mm x 762mm)BBS-U-4830-BPC48"L by 31"W table, with backpanel w/dip basket & Winston clamshell hooks (18" /457mm high)

AyrKing Corporation 2013 Cobalt Drive Louisville, KY 40299-2417

Telephone 502-266-6270 Facsimile 502-266-6274 www.ayrking.com


INCLUDED ACCESSORIES

B101 Red plastic lug plug
B302 White plastic breading lug with hole
B303 White plastic breading lug without hole
B325 White plastic lug cover
B304 White plastic dough ball pan
B122 Round dip basket, stainless steel wire
B123 Round dip pot, stainless steel

OPTIONAL ACCESSORIES

B241 Swivel casters, four locking 5"
B126 Feathering basket, stainless steel wire
B124 Round dip pot lid, stainless steel
B420 Bun Pan Rack, hooks on back panel
B302G Gray plastic breading lug with hole
B303G Gray plastic breading lug without hole
B325G Gray plastic lug cover



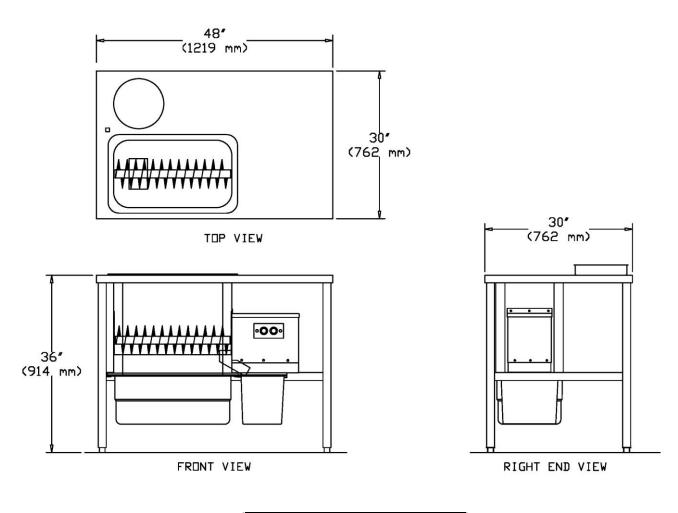

	CRATED MEASUREMENTS				
MODEL	<u>LENGTH</u>	<u>WIDTH</u>	<u>HEIGHT</u>	<u>WEIGHT</u>	<u>UNCRATED</u>
BBS-U-4830	52" (1321mm)	33" (838mm)	44" (1118mm)	200 lb (91kg)	142 lb (64kg)
BBS-U-4830-BPC	52" (1321mm)	33" (838mm)	44" (1118mm)	215 lb (98kg)	157 lb (71kg)

ELECTRICAL

Timed control board automatically senses voltage & operates at either: 115V, 50/60Hz, 1 phase, 1.6 AMP, 184W 230V, 50/60Hz, 1 phase, 0.9 AMP, 207W Includes universal male three prong, recessed AC receptacle (IEC 320 C13) mating to an 8 foot (2438mm) cord with NEMA 5-15P male three prong plug

WARRANTY

One Year Parts Ninety Days Labor No Travel Time

Specifications subject to change without notice. Version 03/17

AyrKing Corporation 2013 Cobalt Drive Louisville, KY 40299-2417

Telephone 502-266-6270 Facsimile 502-266-6274 www.ayrking.com