



Project \_\_\_\_\_  
 Item # \_\_\_\_\_  
 Quantity \_\_\_\_\_

## Glo-Ray® Built-In Rectangular Heated Shelves with Flush Top

Models: GRSBF-24-F, -I, -S, -O; -30-F, -I, -S, -O;  
 -36-F, -I, -S, -O; -42-F, -I, -S, -O; -48-F, -I, -S, -O;  
 -60-F, -I, -S, -O; -72-F, -I, -S, -O

Let Hatco add heat to your serving surface with the Glo-Ray® Rectangular Built-In Heated Shelf with Flush Top. This flush top foodwarmer has a hardcoated aluminum surface and blanket-type element for uniform heat to extend your food holding time. Fiberglass insulation keeps heat at the holding surface while a built-in adjustable thermostat controls surface temperature.

### Standard features


- Uniform heat distribution with hardcoated aluminum surface and blanket-type element
- 36" (914 mm) flexible conduit channels power lines from the shelf to a control box
- GRSBF models are available in widths from 25.5" to 73.5" (648-1867 mm) and depths of 17", 21", 25.5" or 31.5" (432, 533, 648 or 800 mm).
- Enclosure includes a control thermostat, an illuminated power switch and mounting brackets
- Thermostatically-controlled heated base
- The Built-in Heated Shelf has a .75" (19 mm) flanged edge that allows the unit to fit into a countertop opening
- Recommended for use in metallic counters. For other surfaces, verify that the material is suitable for temperature up to 200°F (93°C)♦

\* Models with flush mount recessed electronic control box are not CE approved.  
 \*\* Non-standard colors are non-returnable.  
 ♦ Hatco is not responsible for counter damage caused by heat from the warmer.



### Options (available at time of purchase only)

- Designer Colors for Flush Mount Control Bezel Box - Stainless Steel is standard color\*\*
- Warm Red       Black       Gray Granite       White Granite
  - Navy Blue       Hunter Green       Antique Copper
  - Stainless Steel Top Surface
  - Flush Mount Electronic Control Box with Lighted Power Switch with cord and plug
  - Flush Mount Thermostatic Control Box with Lighted Power Switch with cord and plug
- Conduit in lieu of standard 3' (914 mm) (Flush Mount ITC Control Box only)
- 6' (1829 mm) conduit       10' (3048 mm) conduit

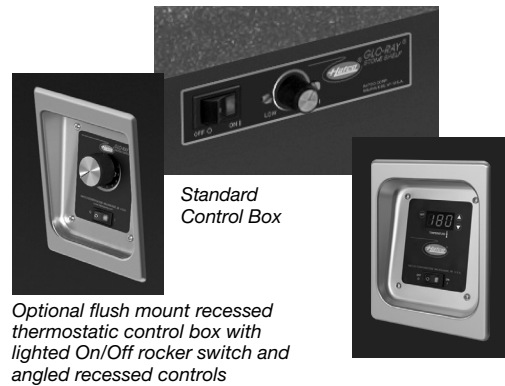

**Note for Built-in Heated Shelves with overhead Strip Heaters:** For any size GRSBF, the next larger size GRA or GR2A Strip Heater will fit over the top. For example, a GRSBF-30 will require a GRA-36 or GR2A-36. The GRA will have a tight fit to the frame of the base. The GR2A will have approximately a 4" (102 mm) space.







# Glo-Ray® Flush Top Built-In Heated Shelves

Models: GRSBF-24-F, -I, -S, -O; -30-F, -I, -S, -O; -36-F, -I, -S, -O; -42-F, -I, -S, -O;  
-48-F, -I, -S, -O; -60-F, -I, -S, -O; -72-F, -I, -S, -O

## GRSBF Models Shown with Standard Control Box

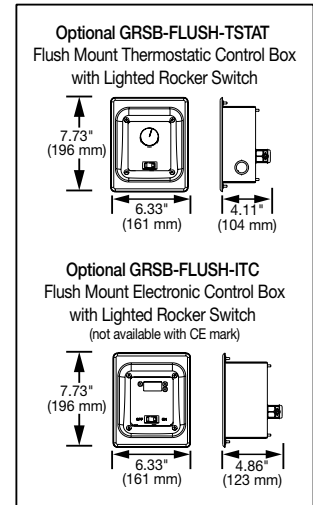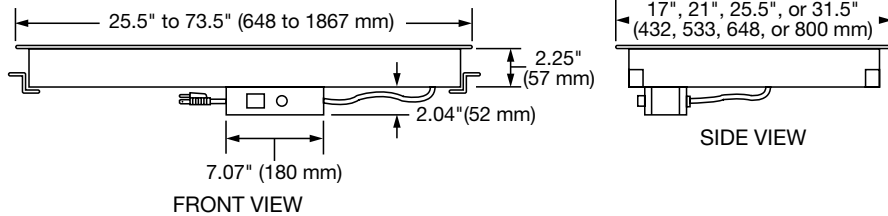


## GRSBF Built-In Countertop Cut-Out Dimensions

| Model      | Minimum Width   | Maximum Width    | Minimum Depth  | Maximum Depth   |
|------------|-----------------|------------------|----------------|-----------------|
| GRSBF-24-F | 24.5" (622 mm)  | 24.75" (629 mm)  | 16" (406 mm)   | 16.25" (413 mm) |
| GRSBF-24-I | 24.5" (622 mm)  | 24.75" (629 mm)  | 20" (508 mm)   | 20.25" (514 mm) |
| GRSBF-24-S | 24.5" (622 mm)  | 24.75" (629 mm)  | 24.5" (622 mm) | 24.75" (629 mm) |
| GRSBF-24-O | 24.5" (622 mm)  | 24.75" (629 mm)  | 30.5" (775 mm) | 30.75" (781 mm) |
| GRSBF-30-F | 30.5" (775 mm)  | 30.75" (781 mm)  | 16" (406 mm)   | 16.25" (413 mm) |
| GRSBF-30-I | 30.5" (775 mm)  | 30.75" (781 mm)  | 20" (508 mm)   | 20.25" (514 mm) |
| GRSBF-30-S | 30.5" (775 mm)  | 30.75" (781 mm)  | 24.5" (622 mm) | 24.75" (629 mm) |
| GRSBF-30-O | 30.5" (775 mm)  | 30.75" (781 mm)  | 30.5" (775 mm) | 30.75" (781 mm) |
| GRSBF-36-F | 36.5" (927 mm)  | 36.75" (933 mm)  | 16" (406 mm)   | 16.25" (413 mm) |
| GRSBF-36-I | 36.5" (927 mm)  | 36.75" (933 mm)  | 20" (508 mm)   | 20.25" (514 mm) |
| GRSBF-36-S | 36.5" (927 mm)  | 36.75" (933 mm)  | 24.5" (622 mm) | 24.75" (629 mm) |
| GRSBF-36-O | 36.5" (927 mm)  | 36.75" (933 mm)  | 30.5" (775 mm) | 30.75" (781 mm) |
| GRSBF-42-F | 42.5" (1080 mm) | 42.75" (1086 mm) | 16" (406 mm)   | 16.25" (413 mm) |
| GRSBF-42-I | 42.5" (1080 mm) | 42.75" (1086 mm) | 20" (508 mm)   | 20.25" (514 mm) |
| GRSBF-42-S | 42.5" (1080 mm) | 42.75" (1086 mm) | 24.5" (622 mm) | 24.75" (629 mm) |
| GRSBF-42-O | 42.5" (1080 mm) | 42.75" (1086 mm) | 30.5" (775 mm) | 30.75" (781 mm) |
| GRSBF-48-F | 48.5" (1232 mm) | 48.75" (1238 mm) | 16" (406 mm)   | 16.25" (413 mm) |
| GRSBF-48-I | 48.5" (1232 mm) | 48.75" (1238 mm) | 20" (508 mm)   | 20.25" (514 mm) |
| GRSBF-48-S | 48.5" (1232 mm) | 48.75" (1238 mm) | 24.5" (622 mm) | 24.75" (629 mm) |
| GRSBF-48-O | 48.5" (1232 mm) | 48.75" (1238 mm) | 30.5" (775 mm) | 30.75" (781 mm) |
| GRSBF-60-F | 60.5" (1537 mm) | 60.75" (1543 mm) | 16" (406 mm)   | 16.25" (413 mm) |
| GRSBF-60-I | 60.5" (1537 mm) | 60.75" (1543 mm) | 20" (508 mm)   | 20.25" (514 mm) |
| GRSBF-60-S | 60.5" (1537 mm) | 60.75" (1543 mm) | 24.5" (622 mm) | 24.75" (629 mm) |
| GRSBF-60-O | 60.5" (1537 mm) | 60.75" (1543 mm) | 30.5" (775 mm) | 30.75" (781 mm) |
| GRSBF-72-F | 72.5" (1842 mm) | 72.75" (1848 mm) | 16" (406 mm)   | 16.25" (413 mm) |
| GRSBF-72-I | 72.5" (1842 mm) | 72.75" (1848 mm) | 20" (508 mm)   | 20.25" (514 mm) |
| GRSBF-72-S | 72.5" (1842 mm) | 72.75" (1848 mm) | 24.5" (622 mm) | 24.75" (629 mm) |
| GRSBF-72-O | 72.5" (1842 mm) | 72.75" (1848 mm) | 30.5" (775 mm) | 30.75" (781 mm) |

## CORD LOCATION

End of remote enclosure.

## PLUG CONFIGURATIONS

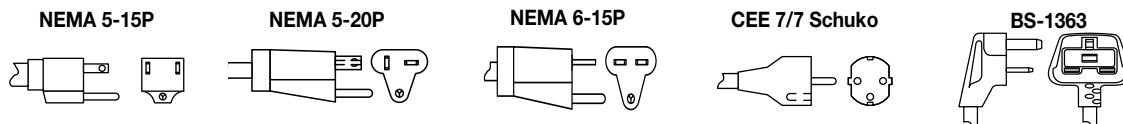

**HATCO CORPORATION** | P.O. Box 340500 Milwaukee, WI 53234-0500 U.S.A.

(800) 558-0607 | (414) 671-6350 | [www.hatcocorp.com](http://www.hatcocorp.com) | [equipsales@hatcocorp.com](mailto:equipsales@hatcocorp.com) | [intlsales@hatcocorp.com](mailto:intlsales@hatcocorp.com)



# Glo-Ray® Flush Top Built-In Heated Shelves

Models: GRSBF-24-F, -I, -S, -O; -30-F, -I, -S, -O; -36-F, -I, -S, -O; -42-F, -I, -S, -O;  
-48-F, -I, -S, -O; -60-F, -I, -S, -O; -72-F, -I, -S, -O

## SPECIFICATIONS

### Built-In Rectangular Heated Shelves with Flush Top

The shaded areas contain electrical information for International models

| Model      | Dimensions (W x D x H)                       | Usable Shelf (W x D)            | Volts        | Phase  | Watts    | Amps    | Plug           | Ship Weight*    |
|------------|--|---------------------------------|--------------|--------|----------|---------|----------------|-----------------|
| GRSBF-24-F | 25.5" x 17" x 2.25"<br>(648 x 432 x 57 mm)   | 25.5" x 17"<br>(648 x 432 mm)   | 120          | Single | 420      | 3.5     | NEMA 5-15P     | 28 lbs. (13 kg) |
|            |  |                                 | 220          |        | 384      | 1.7     | CEE 7/7 Schuko | 28 lbs. (13 kg) |
|            |  |                                 | 240          |        | 458      | 1.9     | BS-1363        |                 |
|            |  |                                 | 220-230 (CE) |        | 384-420  | 1.7-1.8 | CEE 7/7 Schuko |                 |
|            |  |                                 | 230-240 (CE) |        | 420-458  | 1.8-1.9 | BS-1363        |                 |
| GRSBF-24-I | 25.5" x 21" x 2.25"<br>(648 x 533 x 57 mm)   | 25.5" x 21"<br>(648 x 533 mm)   | 100          | Single | 550      | 5.5     | NEMA 5-15P     | 28 lbs. (13 kg) |
|            |  |                                 | 120          |        | 550      | 4.6     | NEMA 5-15P     | 28 lbs. (13 kg) |
|            |  |                                 | 220          |        | 550      | 2.5     | CEE 7/7 Schuko | 28 lbs. (13 kg) |
|            |  |                                 | 240          |        | 550      | 2.3     | BS-1363        |                 |
|            |  |                                 | 220-230 (CE) |        | 550-601  | 2.5-2.6 | CEE 7/7 Schuko |                 |
|            |  |                                 | 230-240 (CE) |        | 505-550  | 2.2-2.3 | BS-1363        |                 |
| GRSBF-24-S | 25.5" x 25.5" x 2.25"<br>(648 x 648 x 57 mm) | 25.5" x 25.5"<br>(648 x 648 mm) | 120          | Single | 700      | 5.8     | NEMA 5-15P     | 32 lbs. (15 kg) |
|            |  |                                 | 220          |        | 640      | 2.9     | CEE 7/7 Schuko | 32 lbs. (15 kg) |
|            |  |                                 | 240          |        | 762      | 3.2     | BS-1363        |                 |
|            |  |                                 | 220-230 (CE) |        | 640-700  | 2.9-3.0 | CEE 7/7 Schuko |                 |
|            |  |                                 | 230-240 (CE) |        | 700-762  | 3.0-3.2 | BS-1363        |                 |
| GRSBF-24-O | 25.5" x 31.5" x 2.25"<br>(648 x 800 x 57 mm) | 25.5" x 31.5"<br>(648 x 800 mm) | 120          | Single | 790      | 6.6     | NEMA 5-15P     | 35 lbs. (16 kg) |
|            |  |                                 | 220          |        | 722      | 3.3     | CEE 7/7 Schuko | 35 lbs. (16 kg) |
|            |  |                                 | 240          |        | 860      | 3.4     | BS-1363        |                 |
|            |  |                                 | 220-230 (CE) |        | 722-790  | 3.3-3.4 | CEE 7/7 Schuko |                 |
|            |  |                                 | 230-240 (CE) |        | 790-860  | 3.4-3.6 | BS-1363        |                 |
| GRSBF-30-F | 31.5" x 17" x 2.25"<br>(800 x 432 x 57 mm)   | 31.5" x 17"<br>(800 x 432 mm)   | 120          | Single | 505      | 4.2     | NEMA 5-15P     | 24 lbs. (11 kg) |
|            |  |                                 | 220          |        | 462      | 2.1     | CEE 7/7 Schuko | 24 lbs. (11 kg) |
|            |  |                                 | 240          |        | 550      | 2.3     | BS-1363        |                 |
|            |  |                                 | 220-230 (CE) |        | 462-505  | 2.1-2.2 | CEE 7/7 Schuko |                 |
|            |  |                                 | 230-240 (CE) |        | 505-550  | 2.2-2.3 | BS-1363        |                 |
| GRSBF-30-I | 31.5" x 21" x 2.25"<br>(800 x 533 x 57 mm)   | 31.5" x 21"<br>(800 x 533 mm)   | 100          | Single | 665      | 6.7     | NEMA 5-15P     | 30 lbs. (14 kg) |
|            |  |                                 | 120          |        | 665      | 5.6     | NEMA 5-15P     | 30 lbs. (14 kg) |
|            |  |                                 | 220          |        | 665      | 3.0     | CEE 7/7 Schuko | 30 lbs. (14 kg) |
|            |  |                                 | 240          |        | 665      | 2.8     | BS-1363        |                 |
|            |  |                                 | 220-230 (CE) |        | 665-727  | 3.0-3.2 | CEE 7/7 Schuko |                 |
|            |  |                                 | 230-240 (CE) |        | 611-665  | 2.7-2.8 | BS-1363        |                 |
| GRSBF-30-S | 31.5" x 25.5" x 2.25"<br>(800 x 648 x 57 mm) | 31.5" x 25.5"<br>(800 x 648 mm) | 120          | Single | 825      | 6.9     | NEMA 5-15P     | 33 lbs. (15 kg) |
|            |  |                                 | 220          |        | 755      | 3.4     | CEE 7/7 Schuko | 33 lbs. (15 kg) |
|            |  |                                 | 240          |        | 898      | 3.7     | BS-1363        |                 |
|            |  |                                 | 220-230 (CE) |        | 755-825  | 3.4-3.6 | CEE 7/7 Schuko |                 |
|            |  |                                 | 230-240 (CE) |        | 825-898  | 3.6-3.7 | BS-1363        |                 |
| GRSBF-30-O | 31.5" x 31.5" x 2.25"<br>(800 x 800 x 57 mm) | 31.5" x 31.5"<br>(800 x 800 mm) | 120          | Single | 950      | 7.9     | NEMA 5-15P     | 37 lbs. (17 kg) |
|            |  |                                 | 220          |        | 868      | 4.0     | CEE 7/7 Schuko | 37 lbs. (17 kg) |
|            |  |                                 | 240          |        | 985      | 4.5     | BS-1363        |                 |
|            |  |                                 | 220-230 (CE) |        | 916-1001 | 4.2-4.4 | CEE 7/7 Schuko |                 |
|            |  |                                 | 230-240 (CE) |        | 904-985  | 3.9-4.1 | BS-1363        |                 |
| GRSBF-36-F | 37.5" x 17" x 2.25"<br>(953 x 432 x 57 mm)   | 37.5" x 17"<br>(953 x 432 mm)   | 120          | Single | 590      | 4.9     | NEMA 5-15P     | 32 lbs. (15 kg) |
|            |  |                                 | 220          |        | 540      | 2.5     | CEE 7/7 Schuko | 32 lbs. (15 kg) |
|            |  |                                 | 240          |        | 642      | 2.7     | BS-1363        |                 |
|            |  |                                 | 220-230 (CE) |        | 540-590  | 2.5-2.6 | CEE 7/7 Schuko |                 |
|            |  |                                 | 230-240 (CE) |        | 590-643  | 2.6-2.7 | BS-1363        |                 |
| GRSBF-36-I | 37.5" x 21" x 2.25"<br>(953 x 533 x 57 mm)   | 37.5" x 21"<br>(953 x 533 mm)   | 100          | Single | 780      | 7.8     | NEMA 5-15P     | 30 lbs. (14 kg) |
|            |  |                                 | 120          |        | 780      | 6.5     | NEMA 5-15P     | 30 lbs. (14 kg) |
|            |  |                                 | 220          |        | 780      | 3.5     | CEE 7/7 Schuko | 30 lbs. (14 kg) |
|            |  |                                 | 240          |        | 780      | 3.3     | BS-1363        |                 |
|            |  |                                 | 220-230 (CE) |        | 780-853  | 3.5-3.7 | CEE 7/7 Schuko |                 |
|            |  |                                 | 230-240 (CE) |        | 716-780  | 3.1-3.3 | BS-1363        |                 |

\* Shipping weight includes packaging.

HATCO CORPORATION | P.O. Box 340500 Milwaukee, WI 53234-0500 U.S.A.

(800) 558-0607 | (414) 671-6350 | www.hatcocorp.com | equipsales@hatcocorp.com | intl@hatcocorp.com



# Glo-Ray® Flush Top Built-In Heated Shelves

Models: GRSBF-24-F, -I, -S, -O; -30-F, -I, -S, -O; -36-F, -I, -S, -O; -42-F, -I, -S, -O;  
-48-F, -I, -S, -O; -60-F, -I, -S, -O; -72-F, -I, -S, -O

## SPECIFICATIONS

### Built-In Rectangular Heated Shelves with Flush Top

The shaded areas contain electrical information for international models

| Model        | Dimensions (W x D x H)                        | Usable Shelf (W x D)             | Volts        | Phase  | Watts     | Amps    | Plug           | Ship Weight*    |
|--------------|---|----------------------------------|--------------|--------|-----------|---------|----------------|-----------------|
| GRSBF-36-S   | 37.5" x 25.5" x 2.25"<br>(953 x 648 x 57 mm)  | 37.5" x 25.5"<br>(953 x 648 mm)  | 120          | Single | 950       | 7.9     | NEMA 5-15P     | 35 lbs. (16 kg) |
|              |   |                                  | 220          |        | 870       | 4.0     | CEE 7/7 Schuko | 35 lbs. (16 kg) |
|              |   |                                  | 240          |        | 1034      | 4.3     | BS-1363        |                 |
|              |   |                                  | 220-230 (CE) |        | 870-951   | 4.0-4.1 | CEE 7/7 Schuko |                 |
|              |   |                                  | 230-240 (CE) |        | 950-1034  | 4.1-4.3 | BS-1363        |                 |
| GRSBF-36-O   | 37.5" x 31.5" x 2.25"<br>(953 x 800 x 57 mm)  | 37.5" x 31.5"<br>(953 x 800 mm)  | 120          | Single | 1110      | 9.3     | NEMA 5-15P     | 37 lbs. (17 kg) |
|              |   |                                  | 220          |        | 1014      | 4.6     | CEE 7/7 Schuko | 37 lbs. (17 kg) |
|              |   |                                  | 240          |        | 1110      | 4.6     | BS-1363        |                 |
|              |   |                                  | 220-230 (CE) |        | 1110-1213 | 5.0-5.3 | CEE 7/7 Schuko |                 |
|              |   |                                  | 230-240 (CE) |        | 1020-1110 | 4.4-4.6 | BS-1363        |                 |
| GRSBF-42-F   | 43.5" x 17" x 2.25"<br>(1105 x 432 x 57 mm)   | 43.5" x 17"<br>(1105 x 432 mm)   | 120          | Single | 685       | 5.7     | NEMA 5-15P     | 38 lbs. (17 kg) |
|              |   |                                  | 220          |        | 627       | 2.9     | CEE 7/7 Schuko | 38 lbs. (17 kg) |
|              |   |                                  | 240          |        | 746       | 3.1     | BS-1363        |                 |
|              |   |                                  | 220-230 (CE) |        | 627-685   | 2.9-3.0 | CEE 7/7 Schuko |                 |
|              |   |                                  | 230-240 (CE) |        | 685-746   | 3.0-3.1 | BS-1363        |                 |
| GRSBF-42-I   | 43.5" x 21" x 2.25"<br>(1105 x 533 x 57 mm)   | 43.5" x 21"<br>(1105 x 533 mm)   | 100          | Single | 885       | 8.9     | NEMA 5-15P     | 32 lbs. (15 kg) |
|              |   |                                  | 120          |        | 885       | 7.4     | NEMA 5-15P     | 32 lbs. (15 kg) |
|              |   |                                  | 220          |        | 885       | 4.0     | CEE 7/7 Schuko | 32 lbs. (15 kg) |
|              |   |                                  | 240          |        | 885       | 3.7     | BS-1363        |                 |
|              |   |                                  | 220-230 (CE) |        | 885-967   | 4.0-4.2 | CEE 7/7 Schuko |                 |
| 230-240 (CE) | 813-885                                       | 3.5-3.7                          | BS-1363      |        |           |         |                |                 |
| GRSBF-42-S   | 43.5" x 25.5" x 2.25"<br>(1105 x 648 x 57 mm) | 43.5" x 25.5"<br>(1105 x 648 mm) | 120          | Single | 1100      | 9.2     | NEMA 5-15P     | 40 lbs. (18 kg) |
|              |   |                                  | 220          |        | 1006      | 4.6     | CEE 7/7 Schuko | 40 lbs. (18 kg) |
|              |   |                                  | 240          |        | 1198      | 5.0     | BS-1363        |                 |
|              |   |                                  | 220-230 (CE) |        | 1006-1100 | 4.6-4.8 | CEE 7/7 Schuko |                 |
|              |   |                                  | 230-240 (CE) |        | 1100-1198 | 4.8-5.0 | BS-1363        |                 |
| GRSBF-42-O   | 43.5" x 31.5" x 2.25"<br>(1105 x 800 x 57 mm) | 43.5" x 31.5"<br>(1105 x 800 mm) | 120          | Single | 1270      | 10.6    | NEMA 5-15P     | 48 lbs. (22 kg) |
|              |   |                                  | 220          |        | 1161      | 5.3     | CEE 7/7 Schuko | 48 lbs. (22 kg) |
|              |   |                                  | 240          |        | 1305      | 5.4     | BS-1363        |                 |
|              |   |                                  | 220-230 (CE) |        | 1236-1351 | 5.6-5.9 | CEE 7/7 Schuko |                 |
|              |   |                                  | 230-240 (CE) |        | 1198-1305 | 5.2-5.4 | BS-1363        |                 |
| GRSBF-48-F   | 49.5" x 17" x 2.25"<br>(1257 x 432 x 57 mm)   | 49.5" x 17"<br>(1257 x 432 mm)   | 120          | Single | 770       | 6.4     | NEMA 5-15P     | 35 lbs. (16 kg) |
|              |   |                                  | 220          |        | 705       | 3.2     | CEE 7/7 Schuko | 35 lbs. (16 kg) |
|              |   |                                  | 240          |        | 828       | 3.5     | BS-1363        |                 |
|              |   |                                  | 220-230 (CE) |        | 704-770   | 3.2-3.3 | CEE 7/7 Schuko |                 |
|              |   |                                  | 230-240 (CE) |        | 770-839   | 3.3-3.5 | BS-1363        |                 |
| GRSBF-48-I   | 49.5" x 21" x 2.25"<br>(1257 x 533 x 57 mm)   | 49.5" x 21"<br>(1257 x 533 mm)   | 100          | Single | 1000      | 10.0    | NEMA 5-15P     | 40 lbs. (18 kg) |
|              |   |                                  | 120          |        | 1000      | 8.3     | NEMA 5-15P     | 40 lbs. (18 kg) |
|              |   |                                  | 220          |        | 1000      | 4.5     | CEE 7/7 Schuko | 40 lbs. (18 kg) |
|              |   |                                  | 240          |        | 1000      | 4.2     | BS-1363        |                 |
|              |   |                                  | 220-230 (CE) |        | 1000-1093 | 4.5-4.7 | CEE 7/7 Schuko |                 |
| 230-240 (CE) | 918-1000                                      | 4.0-4.2                          | BS-1363      |        |           |         |                |                 |
| GRSBF-48-S   | 49.5" x 25.5" x 2.25"<br>(1257 x 648 x 57 mm) | 49.5" x 25.5"<br>(1257 x 648 mm) | 120          | Single | 1225      | 10.2    | NEMA 5-15P     | 42 lbs. (19 kg) |
|              |   |                                  | 220          |        | 1121      | 5.1     | CEE 7/7 Schuko | 42 lbs. (19 kg) |
|              |   |                                  | 240          |        | 1334      | 5.6     | BS-1363        |                 |
|              |   |                                  | 220-230 (CE) |        | 1121-1225 | 5.1-5.3 | CEE 7/7 Schuko |                 |
|              |   |                                  | 230-240 (CE) |        | 1225-1334 | 5.3-5.6 | BS-1363        |                 |
| GRSBF-48-O   | 49.5" x 31.5" x 2.25"<br>(1257 x 800 x 57 mm) | 49.5" x 31.5"<br>(1257 x 800 mm) | 120          | Single | 1430      | 11.9    | NEMA 5-15P     | 48 lbs. (22 kg) |
|              |   |                                  | 220          |        | 1307      | 6.0     | CEE 7/7 Schuko | 48 lbs. (22 kg) |
|              |   |                                  | 240          |        | 1430      | 6.0     | BS-1363        |                 |
|              |   |                                  | 220-230 (CE) |        | 1430-1562 | 6.5-6.8 | CEE 7/7 Schuko |                 |
|              |   |                                  | 230-240 (CE) |        | 1313-1430 | 5.7-6.0 | BS-1363        |                 |

\* Shipping weight includes packaging.

HATCO CORPORATION | P.O. Box 340500 Milwaukee, WI 53234-0500 U.S.A.

(800) 558-0607 | (414) 671-6350 | www.hatcocorp.com | equipsales@hatcocorp.com | intl@hatcocorp.com



# Glo-Ray® Flush Top Built-In Heated Shelves

Models: GRSBF-24-F, -I, -S, -O; -30-F, -I, -S, -O; -36-F, -I, -S, -O; -42-F, -I, -S, -O;  
-48-F, -I, -S, -O; -60-F, -I, -S, -O; -72-F, -I, -S, -O

## SPECIFICATIONS

### Built-In Rectangular Heated Shelves with Flush Top

The shaded areas contain electrical information for International models

| Model      | Dimensions (W x D x H)                        | Usable Shelf (W x D)             | Volts        | Phase  | Watts     | Amps    | Plug           | Ship Weight*    |
|------------|---|----------------------------------|--------------|--------|-----------|---------|----------------|-----------------|
| GRSBF-60-F | 61.5" x 17" x 2.25"<br>(1562 x 432 x 57 mm)   | 61.5" x 17"<br>(1562 x 432 mm)   | 120          | Single | 950       | 7.9     | NEMA 5-15P     | 41 lbs. (19 kg) |
|            |   |                                  | 220          |        | 870       | 4.0     | CEE 7/7 Schuko | 41 lbs. (19 kg) |
|            |   |                                  | 240          |        | 1034      | 4.3     | BS-1363        |                 |
|            |   |                                  | 220-230 (CE) |        | 869-950   | 4.0-4.1 | CEE 7/7 Schuko |                 |
|            |   |                                  | 230-240 (CE) |        | 950-1035  | 4.1-4.3 | BS-1363        |                 |
| GRSBF-60-I | 61.5" x 21" x 2.25"<br>(1562 x 533 x 57 mm)   | 61.5" x 21"<br>(1562 x 533 mm)   | 100          | Single | 1220      | 12.2    | NEMA 5-15P     | 48 lbs. (22 kg) |
|            |   |                                  | 120          |        | 1220      | 10.2    | NEMA 5-15P     | 48 lbs. (22 kg) |
|            |   |                                  | 220          |        | 1220      | 5.5     | CEE 7/7 Schuko |                 |
|            |   |                                  | 240          |        | 1220      | 5.1     | BS-1363        |                 |
|            |   |                                  | 220-230 (CE) |        | 1220-1333 | 5.5-5.8 | CEE 7/7 Schuko |                 |
|            |   |                                  | 230-240 (CE) |        | 1120-1220 | 4.9-5.1 | BS-1363        |                 |
| GRSBF-60-S | 61.5" x 25.5" x 2.25"<br>(1562 x 648 x 57 mm) | 61.5" x 25.5"<br>(1562 x 648 mm) | 120          | Single | 1500      | 12.5    | NEMA 5-20P     | 55 lbs. (25 kg) |
|            |   |                                  | 220          |        | 1372      | 6.2     | CEE 7/7 Schuko | 55 lbs. (25 kg) |
|            |   |                                  | 240          |        | 1634      | 6.8     | BS-1363        |                 |
|            |   |                                  | 220-230 (CE) |        | 1372-1500 | 6.2-6.5 | CEE 7/7 Schuko |                 |
|            |   |                                  | 230-240 (CE) |        | 1501-1634 | 6.5-6.8 | BS-1363        |                 |
| GRSBF-60-O | 61.5" x 31.5" x 2.25"<br>(1562 x 800 x 57 mm) | 61.5" x 31.5"<br>(1562 x 800 mm) | 120          | Single | 1750      | 14.6    | NEMA 5-20P     | 64 lbs. (29 kg) |
|            |   |                                  | 220          |        | 1600      | 7.3     | CEE 7/7 Schuko | 64 lbs. (29 kg) |
|            |   |                                  | 240          |        | 1750      | 7.3     | BS-1363        |                 |
|            |   |                                  | 220-230 (CE) |        | 1750-1912 | 8.0-8.3 | CEE 7/7 Schuko |                 |
|            |   |                                  | 230-240 (CE) |        | 1607-1750 | 7.0-7.3 | BS-1363        |                 |
| GRSBF-72-F | 73.5" x 17" x 2.25"<br>(1867 x 432 x 57 mm)   | 73.5" x 17"<br>(1867 x 432 mm)   | 120          | Single | 1130      | 9.4     | NEMA 5-15P     | 44 lbs. (20 kg) |
|            |   |                                  | 220          |        | 1034      | 4.7     | CEE 7/7 Schuko | 44 lbs. (20 kg) |
|            |   |                                  | 240          |        | 1230      | 5.1     | BS-1363        |                 |
|            |   |                                  | 220-230 (CE) |        | 1034-1130 | 4.7-4.9 | CEE 7/7 Schuko |                 |
|            |   |                                  | 230-240 (CE) |        | 1130-1231 | 4.9-5.1 | BS-1363        |                 |
| GRSBF-72-I | 73.5" x 21" x 2.25"<br>(1867 x 533 x 57 mm)   | 73.5" x 21"<br>(1867 x 533 mm)   | 120          | Single | 1440      | 12.0    | NEMA 5-15P     | 52 lbs. (24 kg) |
|            |   |                                  | 220          |        | 1440      | 6.5     | CEE 7/7 Schuko | 52 lbs. (24 kg) |
|            |   |                                  | 240          |        | 1440      | 6.0     | BS-1363        |                 |
|            |   |                                  | 220-230 (CE) |        | 1440-1574 | 6.5-6.8 | CEE 7/7 Schuko |                 |
|            |   |                                  | 230-240 (CE) |        | 1322-1440 | 5.8-6.0 | BS-1363        |                 |
| GRSBF-72-S | 73.5" x 25.5" x 2.25"<br>(1867 x 648 x 57 mm) | 73.5" x 25.5"<br>(1867 x 648 mm) | 120          | Single | 1750      | 14.6    | NEMA 5-20P     | 59 lbs. (27 kg) |
|            |   |                                  | 220          |        | 1602      | 7.3     | CEE 7/7 Schuko | 59 lbs. (27 kg) |
|            |   |                                  | 240          |        | 1906      | 7.9     | BS-1363        |                 |
|            |   |                                  | 220-230 (CE) |        | 1602-1751 | 7.3-7.6 | CEE 7/7 Schuko |                 |
|            |   |                                  | 230-240 (CE) |        | 1750-1906 | 7.6-7.9 | BS-1363        |                 |
| GRSBF-72-O | 73.5" x 31.5" x 2.25"<br>(1867 x 800 x 57 mm) | 73.5" x 31.5"<br>(1867 x 800 mm) | 208          | Single | 2070      | 10.0    | NEMA 6-15P     | 68 lbs. (31 kg) |
|            |   |                                  | 240          |        | 2070      | 8.6     |                |                 |
|            |   |                                  | 220          |        | 1894      | 8.6     | CEE 7/7 Schuko | 68 lbs. (31 kg) |
|            |   |                                  | 240          |        | 2070      | 8.6     | BS-1363        |                 |
|            |   |                                  | 220-230 (CE) |        | 2070-2262 | 9.4-9.8 | CEE 7/7 Schuko |                 |
|            |   |                                  | 230-240 (CE) |        | 1901-2070 | 8.3-8.6 | BS-1363        |                 |

\* Shipping weight includes packaging.

## PRODUCT SPECS

### Glo-Ray® Built-In Heated Shelves with Flush Top

The Built-in Rectangular Heated Shelf with Flush Top shall be a Glo-Ray® Model ... as manufactured by the Hatco Corporation, Milwaukee, WI 53234 U.S.A.

The Rectangular Heated Shelf shall be rated at ... watts, ... volts, and ... inches (millimeters) in overall width.

It shall consist of thermostatically-controlled heated base with 3' (914 mm) conduit to control box and a 6' (1829 mm) cord with plug attached.

Warranty consists of 24/7 parts and service assistance (U.S. and Canada only).

**HATCO CORPORATION** | P.O. Box 340500 Milwaukee, WI 53234-0500 U.S.A.

(800) 558-0607 | (414) 671-6350 | www.hatcocorp.com | equipsales@hatcocorp.com | intl@hatcocorp.com