

PROJECT	QUANTITY	ITEM NO
---------	----------	---------

Express Profit Center

EPC 300
EPC 400
 Short profile



EPC 400 Express profit center short profile
 4-ft unit on available casters

Henny Penny express profit centers present an excellent solution for retailers seeking to expand hot food impulse sales and cross-merchandising opportunities.

These attractive cases not only offer mobility with “grab-n-go” convenience, they display prepackaged hot food safely *for up to 4 hours!*

Innovative FreshLock™ air curtain technology directs a continuous flow of heat across the open front of the case forming an effective barrier between ambient conditions and the case’s internal climate. This air “curtain” not only conserves heat but promotes even heat flow throughout the case, eliminating cold spots.

The EPC 300 and 400 are 3 and 4-foot cases in a short profile design that offers plenty of capacity without hindering sightlines. Perfect near checkout lanes and in high-traffic areas.

The EPC is sturdy but moves easily on available casters. A single-

Air Curtain locks in 4 hour holding!

FreshLock™ air curtain technology secures interior climate for safe holding of hot fresh food for up to 4 hours under the following conditions:*

- Ambient temperature: 70°–74°F (21°–23°C)
- Product: whole chickens 3.0–3.5 lb (1.4–1.6 kg) in domes (Pactiv CNC-6007)
- Chickens at core temperature of 180°–190°F (82°–88°C)
- Shelf heat at recommended settings
- Unit operated at rated voltage

* Safe holding times may vary depending on product

phase electrical option enables units to be moved into various key locations at any time.

Long-lasting, energy saving LEDs provide brilliant lighting while reducing maintenance costs and environmental impact.

Each shelf’s temperature settings can be adjusted separately. Shelving is lightweight, adjustable, and removes easily for cleaning.

Standard features

- FreshLock™ air curtain secures climate for longer holding times and less product waste
 - Reach-in grab-n-go convenience
 - Even heating throughout case (under ideal holding conditions)
- Short profile preserves sightlines at checkout and in high traffic areas
- Low-energy, long-life LED lighting for brilliant product presentation and reduced environmental impact
- Clear side panels for added product visibility
- Black matte finish on main cabinet
- Easily relocated throughout store for excellent merchandising capabilities
- 2 lightweight, adjustable angled shelves
- Heated shelves and deck with independent temperature controls
- Flush mounted control pad with temperature display
- Front and side protective bumpers
- Stainless steel construction for easy cleaning and long life

Optional accessories


- 4 heavy-duty casters, 2 locking (not available for CE units)
- Leveling legs
- Set of black wire baskets and attachments for dry cross merchandising, 2 side and 1 top

<input type="checkbox"/> APPROVED	<input type="checkbox"/> APPROVED AS NOTED	<input type="checkbox"/> RESUBMIT
AUTHORIZED SIGNATURE		DATE



Express profit center

EPC 300
EPC 400
Short profile

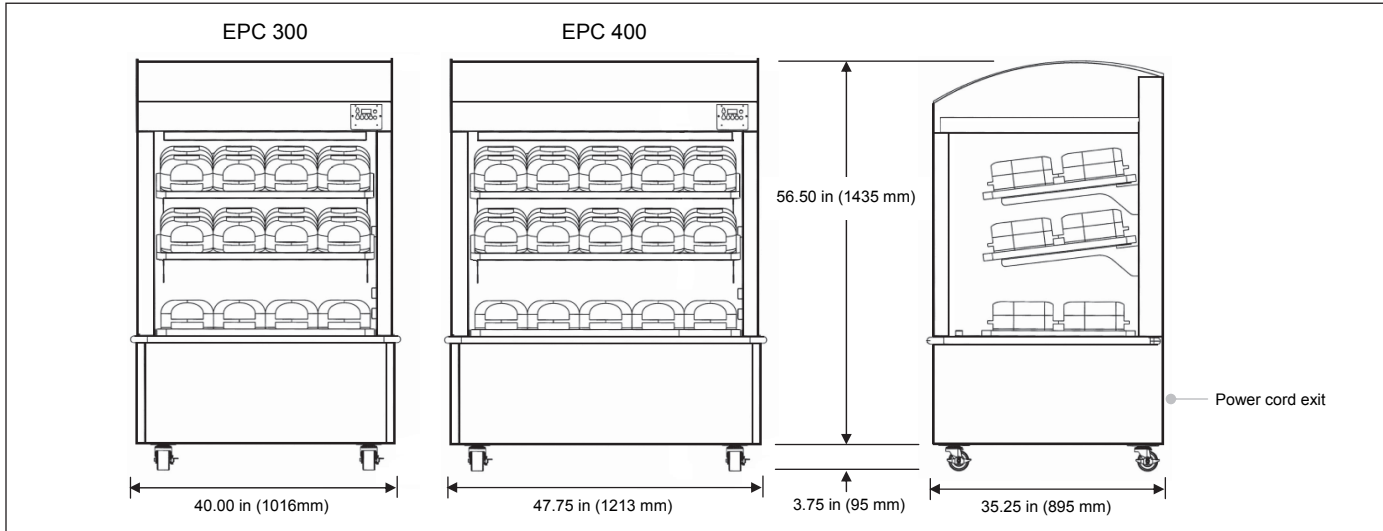

	EPC 300	EPC 400
Dimensions		
Height	56.50 in (1435 mm)	56.50 in (1435 mm)
	60.25 in (1530 mm) with casters	60.25 in (1530 mm) with casters
Width	40.00 in (1016 mm)	47.75 in (1213 mm)
Depth	35.25 in (895 mm)	35.25 in (895 mm)
Crated		
Length	43 in (1090 mm)	51 in (1295 mm)
Depth	41 in (1040 mm)	41 in (1040 mm)
Height	69 in (1750 mm)	69 in (1750 mm)
Volume	71 ft ³ (2.0 m ³)	84 ft ³ (2.4 m ³)
Weight	483 lb (219 kg)	531 lb (241 kg)
Capacity		
Per shelf/deck	31.00 x 21.50 in (787 x 546 mm) 8 chicken domes	38.75 x 21.50 (984 x 546 mm) 10 chicken domes
Total	13.9 ft ² (1.29 m ²) 24 chicken domes	17.4 ft ² (1.61 m ²) 30 chicken domes

Heat

Duty cycle: 0%–100%

Required clearances

Back 4 in (102 mm) for power cord

Bidding specifications

Provide Henny Penny model EPC 300 or EPC 400 express profit center short profile heated self-serve merchandiser designed to hold and display prepackaged hot food items safely for up to 4 hours under ideal holding conditions.

Unit shall incorporate:

- FreshLock™ air curtain technology to secure climate for maintaining safe holding temperatures
- Lower height to preserve sightlines at checkout
- Adjustable shelving with separate temperature controls for each shelf
- 2 angled shelves plus flat deck
- Energy-saving bright LED lighting
- Stainless steel exterior
- Protective bumper front and sides
- Choice of single or 3-phase electrical connection
- Choice of casters, 2 locking (not available for CE units), or leveling legs

Electrical		EPC 300		EPC 400			
Volts	Phase	Hertz	kW	Amps	kW	Amps	Wire
208	1	60	3.57	17.2	4.58	22.0	2+G
240	1	60	3.58	15.7	4.60	20.0	2+G
208	3	60	3.57	14.8	4.58	19.0	3+G
240	3	60	3.58	12.8	4.60	16.5	3+G
400	3	50–60	3.58	8.5	4.60	7.5	3NG

1 Phase NEMA 6-20P		NEMA 6-30P	
3 Phase NEMA 15-20P		NEMA 15-30P	

Laboratory certifications

Continuing product improvement may subject specifications to change without notice.

24 Hour Technical Support:
Henny Penny Technical Service
800.417.8405
technicalservices@hennypenny.com

Henny Penny Corporation
PO Box 60 Eaton OH 45320 USA
+1 937 456.8400 800 417.8417
+1 937 456.8434 Fax 800 417.8434 Fax
www.hennypenny.com

HENNY PENNY
Engineered to Last