





Indigo™ Series 1200 Ice Cube Machine

☐ ID-1203W Model: DID-1202A ∏_{IY-1204A}

Ice Machine on B-570 Bin

Ice Machine Electric 208-230/60/1 standard

(208-230/60/3 and 230/50/1 also available.)

Minimum circuit ampacity:

Air-cooled: 25 1ph 16 3ph Water-cooled: 25 1ph 16 3ph

Maximum fuse size:

Air-cooled: 20 3ph Water-cooled: 25 1ph 20 3ph

Specifications

BTU Per Hour:

20,700 (average) 24,500 (peak)

Refrigerant:

R-404A CFC-free

Operating Limits:

Indigo Series i-1200

- Ambient Temperature Range: 35° to 110°F (1.7° to 43.3°C) Water Temperature Range: 35° to 90°F (1.7° to 32.2°C)
- · Water Pressure Ice Maker Water In: Min. 20 psi (137.9 kPA) Max. 80 psi (551.1 kPA)

Designed for operators who know that ice is critical to their business, the Indigo™ Series ice machine's preventative diagnostics continually monitor itself for reliable ice production. Improvements in cleanability and programmability make your ice machine easy to own and less expensive to operate.

] IY-1205W

- Space-Saving Design Up to 1,205 lbs. (547 kgs.) daily ice production and only 30" (76.20 cm) wide.
- Intelligent Diagnostics provide 24 hour preventative maintenance and diagnostic feedback for trouble free operation.
- Acoustical Ice Sensing Probe for reliable operation in challenging water conditions.
- EasyRead Display communicates operating status, cleaning reminders, and asset information through a blue illuminated display.
- Programmable Ice Production by On/Off Time, Ice Volume or Bin Level (with accessory bin level control) further improves energy efficiency and savings.
- Easy to Clean Foodzone Hinged front door swings out for easy access. Removable water-trough, distribution tube, curtain, and sensing probes for fast and efficient cleaning. Select components made with AlphaSan® antimicrobial.
- **DuraTech™ Exterior** provides superior corrosion resistance. Stainless finish with innovative clear-coat resists fingerprints and dirt.
- Available LuminIce[™] Growth Inhibitor controls the growth of bacteria and yeast within the foodzone.



Ice Shape





Dice ⁷/8" **x** ⁷/8" **x** ⁷/8" (2.22 x 2.22 x 2.22 cm)














: ISO 9001:2008 =

2110 South 26th Street PO Box 1720 Manitowoc, WI 54221-1720 USA Tel: 1.920.682.0161 Fax: 1.920.683.7589 www.manitowocice.com







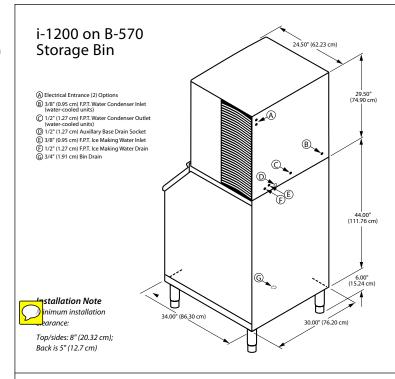

Space-Saving Designs





i_1200

	B-570	B-970*
Height	79.50" 201.93 cm	79.50" 201.93 cm
Width	30.00" 76.20 cm	48.00" 121.92 cm
Depth	34.00" 86.30 cm	34.00" 86.30 cm
Bin Storage	430 lbs. 195 kgs.	710 lbs. 322.2 kgs.

Height includes adjustable bin legs 6.00" to 8.00", (15.24 to 20.32 cm) set at 6.00" (15.24 cm).

*K-00370 bin adapter required.

Specifications

			lce	Ice Production 24 Hours		Power Usage kWh/100 lbs. @90°Air/70°F		Water Usage/ 100 lbs. 45.4 kgs. of Ice	ENERGY
		Model	Shape	70°Air/ 50°F Water	90°Air/ 70°F Water	1 Ph	3 Ph	Potable Water	STAR*
0	_	ID-1202A	dice	1,100 lbs.	870 lbs.	5.32	5.32	20.7 gal.	*
5				499 kgs.	395 kgs.			78.4 L.	
AIR-COOLED	1	IY-1204A half-dice	half-dice	1,205 lbs.	930 lbs.	5.26	5.26	20.7 gal.	*
	۲			547 kgs.	422 kgs.			78.4 L.	
WATER-COOLED		ID-1203W	dice	1,165 lbs.	900 lbs.	4.58	4.58	20.7 gal.	- NA
	3			528 kgs.	408 kgs.			78.4 L.	
	5	IY-1205W half-dice	1,170 lbs.	1,010 lbs.	4.40	4.40	20.7 gal.	NA	
	Ë		-	531 kgs.	458 kgs.	4.40	4.40	78.4 L.	INA
3	Š	* Water-cooled Condenser Water Usage / 100 lbs. /45.4 kgs. Of Ice: 169 gal. / 640 L.							

* Water-cooled models are excluded from ENERGY STAR qualification.

Order ice storage bin separately. To order 3 phase add "3" suffix to model # (ID-1202A3).

Accessories

LuminIce™ Growth Inhibitor reduces yeast and bacteria growth for a cleaner ice machine.



Bin Level Control Allows ice bin level to be automatically set. Built-in LED light illuminates bin.



Arctic Pure®
Water Filters
Reduces
sediment and
chlorine odors for

better tasting ice.



AuCS® schedules and performs routine ice machine cleaning automatically.



4773 (replaces 31990 S-1200) ©2011 Manitowoc 1/11. Continuing product improvement may necessitate change of specifications without notice

2110 South 26th Street
PO Box 1720
Manitowoc, WI 54221-1720 USA

Tel: 1.920.682.0161 Fax: 1.920.683.7589 www.manitowocice.com



