





Indigo™ Series 522 Ice Cube Machine

☐ ID-0523W Model: ID-0522A J₁Y-0524A

Ice Machine Electric

115/60/1 standard. (208-230/60/1 also available)

Minimum circuit ampacity:

Air-cooled: 20 1ph Water-cooled: 13.5 1ph

Specifications

BTU Per Hour:

5,300 (average) 6,100 (peak)

Refrigerant:

R-404A CFC-free

Maximum fuse size:

Air-cooled: 20 1ph Water-cooled: 20 1ph

Indigo Series i-522

Ice Machine on B-420 Bin

Operating Limits:

- **Ambient Temperature Range:** 35° to 110°F (1.7° to 43.3°C) Water Temperature Range: 35° to 90°F (1.7° to 32.2°C)
- · Water Pressure Ice Maker Water In: Min. 20 psi (137.9 kPA) Max. 80 psi (551.1 kPA)

Designed for operators who know that ice is critical to their business, the Indigo™ Series ice machine's preventative diagnostics continually monitor itself for reliable ice production. Improvements in cleanability and programmability make your ice machine easy to own and less expensive to operate.

☐ IY-0525W

- Space-Saving Design Up to 485 lbs. (220 kgs.) daily ice production and only 22" (55.88 cm) wide.
- Intelligent Diagnostics provide 24 hour preventative maintenance and diagnostic feedback for trouble free operation.
- Acoustical Ice Sensing Probe for reliable operation in challenging water conditions.
- EasyRead Display communicates operating status, cleaning reminders, and asset information through a blue illuminated display.
- Programmable Ice Production by On/Off Time, Ice Volume or Bin Level (with accessory bin level control) further improves energy efficiency and savings.
- Easy to Clean Foodzone Hinged front door swings out for easy access. Removable water-trough, distribution tube, curtain, and sensing probes for fast and efficient cleaning. Select components made with AlphaSan® antimicrobial.
- **DuraTech™ Exterior** provides superior corrosion resistance. Stainless finish with innovative clear-coat resists fingerprints and dirt.
- Available **LuminIce™ Growth Inhibitor** controls the growth of bacteria and yeast within the foodzone.



Ice Shape





Dice ⁷/8" X (2.22 x 2.22 x 2.22 cm)














: ISO 9001:2008 :

2110 South 26th Street PO Box 1720 Manitowoc, WI 54221-1720 USA Tel: 1.920.682.0161 Fax: 1.920.683.7589 www.manitowocice.com







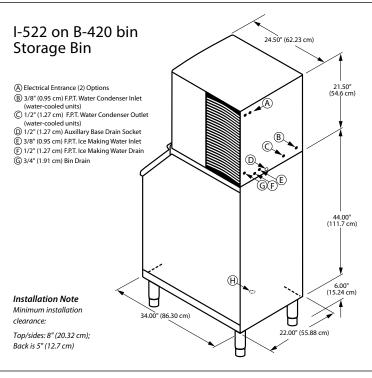

Space-Saving Designs



	B-420	B-400*	
Height	76.50" 194.31 cm	64.50" 193.83 cm	
Width	22.00" 55.88 cm	30.00" 76.20 cm	
Depth	34.00" 86.30 cm	34.00" 86.30 cm	
Bin Storage	310 lbs. 140.7 kgs.	290 lbs. 131.7 kgs.	

Height includes adjustable bin legs 6.00" to 8.00", (15.24 to 20.32 cm) set at 6.00" (15.24 cm).

Specifications

				Ice Producti	on 24 Hours	Power Usage kWh/100 lbs.	Water Usage/100 lbs. 45.4 kgs. of Ice	ENERGY
		Model	Ice Shape	70°Air/ 50°F Water	90°Air/ 70°F Water	@90°Air/70°F	Potable Water	STAR*
	AIR-COOLED	ID-0522A	dice	475 lbs.	325 lbs.	6.72	23.8 Gal.	
		ID-0322A		215 kgs.	147 kgs.	0.72	90.1 L	*
		IY-0524A half-di	half-dice	485 lbs.	340 lbs.	6.60	23.8 Gal.	*
				220 kgs.	154 kgs.		90.1 L	
	WATER-COOLED	ID-0523W dice	dice	460 lbs.	375 lbs.	5.09	23.8 Gal.	NA
				209 kgs.	170 kgs.		90.1 L	
		IY-0525W half-dice	480 lbs.	395 lbs.	4.87	23.8 Gal.	NA	
				218 kgs.	179 kgs.	4.87	90.1 L	INA
	M	* Water-cooled Condenser Water Usage / 100 lbs. /45.4 kgs. Of Ice: 190 gal/ 719 L.						

* Water-cooled models are excluded from ENERGY STAR qualification.

Order ice storage bin separately.

Accessories

LuminIce™ **Growth Inhibitor** reduces yeast and bacteria growth for a cleaner ice machine.



Bin Level Control Allows ice bin level to be automatically set. Built-in LED light illuminates bin.




Arctic Pure® Water Filters

Reduces sediment and chlorine odors for better tasting ice.



schedules and





2110 South 26th Street PO Box 1720 Manitowoc, WI 54221-1720 USA Tel: 1.920.682.0161 Fax: 1.920.683.7589 www.manitowocice.com





4776 (replaces 2979E S-422) © 2011 Manitowoc. Continuing product improvement may necessitate change of specifications without notice.

^{*} K-00141 bin adapter required.