

TRUE EUROPE

Field's End Road, Goldthorpe, Nr. Rotherham, South Yorkshire S63 9EU, UK www.truemfg.com • Tel +44 01709 888 080 • Fax +44 01709 880 838 Free Phone 0 800 783 2049 • Free Phone to U.S. 0 800 894 928 MADE IN UND 24 N NINCE 1935 12/16

Model: GDM-19T-HC~TSL01

Glass Door Merchandiser:

Swing Door Refrigerator with Hydro Carbon Refrigerant~True Standard Look Version 01




GDM-19T-HC~TSL01

- The world's #1 manufacturer of glass door merchandisers.
- Factory engineered, self-contained, capillary tube system using environmentally friendly R290 hydrocarbon refrigerant that has zero (0) ozone depletion potential (ODP), & three (3) global warming potential (GWP).
- High capacity, factory balanced refrigeration system that maintains cabinet temperatures of 33°F to 38°F (.5°C to 3.3°C) for the best in food preservation.
- Exterior non-peel or chip black powder coated cold rolled steel; durable and permanent.
- Interior attractive, NSF approved, white aluminum interior liner with stainless steel floor.
- Self closing door. Positive seal, torsion type closure system.
- LED interior lighting provides more even lighting throughout the cabinet. Safety shielded.
- "Low-E", double pane thermal insulated glass door assembly with extruded aluminum frame. The latest in energy efficient technology.
- Entire cabinet structure is foamed-inplace using a high density, polyurethane insulation that has zero ozone depletion potential (ODP) and zero global warming potential (GWP).

Bottom mounted units feature

- "No stoop" lower shelf to maximize product visibility.
- Storage on top of cabinet.
- Easily accessible condenser coil for cleaning.

PLAN VIEW

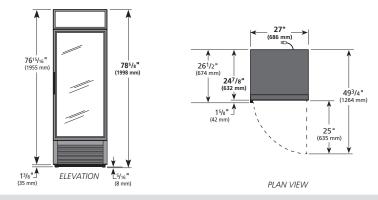

ROUGH-IN DATA Specifications subject to change without notice. Chart dimensions rounded up to the next whole millimeter (inches rounded up to the next 1/8"). **Cabinet Dimensions** Crated (mm) Capacity Weight Model Doors Shelves W D Н HP Voltage Amps (litres) Refrigerant (kg) 479 R290 GDM-19T-HC~TSL01 1 4 686 632 1998 1⁄3 230-240/50/1 2.4 143

† Depth does not include 42 mm for door handles.