	Project Name: _		
TRUE FOOD SERVICE EQUIPMENT, INC.	Location:		_
2001 East Terra Lane • O'Fallon, Missouri 63366-4434 • (636)240-2400 Fax (636)272-2408 • Toll Free (800)325-6152 • Intl Fax# (001)636-272-7546	Item #:	Qty:	
Parts Dept. (800)424-TRUE • Parts Dept. Fax# (636)272-9471 • www.truemfg.com	Model #:		_
Model: GDM-45-LDGlass Door Merchandiser: Slide Door Refrigerator with LED	Lighting		
		GDM-45-I	Л
true.		 The world's #1 manufa glass door merchandis 	cturer of
		 Oversized, factory bala refrigeration system ho 38°F (.5°C to 3.3°C). 	
		Exterior - non-peel or or laminated vinyl; durab permanent.	
		Interior - attractive, NS approved, white alumi interior liner with stain floor.	num
		Self closing doors. Cou balanced weight syste smooth, even, positive	m for
		 "Low-E", double pane t insulated glass door as with mitered plastic ch frames. The latest in en efficient technology. 	semblies annel
		Entire cabinet structure foamed-in-place using A high density, polyure insulation that has zero depletion potential (O zero global warming p (GWP).	Ecomate. ethane o ozone DP) and
		Bottom mounted units	
		 "No stoop" lower shelf maximize product visil 	
		Storage on top of cabi	net.
shown with optional white exterior.	Scan code	Easily accessible conde for cleaning.	enser coil

ROUGH-IN DATA

Specifications subject to change without notice. Chart dimensions rounded up to the nearest ½" (millimeters rounded up to next whole number).

			Cabinet Dimensions (inches) (mm)					NEMA	Cord Length (total ft.)	Crated Weight (lbs.)	
Model	Doors	Shelves	L	D†	Н	ΗP	Voltage	Amps	Config.		(kg)
GDM-45-LD	2	8	511⁄8	295⁄8	785⁄8	1⁄2	115/60/1	9.6	5-15P	9	460
			1299	753	1998	1⁄2	230-240/50/1	5.4		2.74	209

† Depth does not include ³/₈" (10 mm) for door handles.

▲ Plug type varies by country.

		APPROVALS:	AVAILABLE AT:
9/15	Printed in U.S.A.		

Model: GDM-45-LD

Glass Door Merchandiser: *Slide Door Refrigerator with LED Lighting*



STANDARD FEATURES

DESIGN

 True's commitment to using the highest quality materials and oversized refrigeration systems provides the user with colder product temperatures, and lower utility costs in an attractive merchandiser that brilliantly displays packaged food and beverages.

REFRIGERATION SYSTEM

- Factory engineered, self-contained, capillary tube system using environmentally friendly (CFC free) 134A refrigerant.
- Extra large evaporator coil balanced with higher horsepower compressor and large condenser; maintains cabinet temperatures of 33°F to 38°F (.5°C to 3.3°C).
- Sealed, cast iron, self-lubricating evaporator fan motor(s) and larger fan blades give True merchandisers a more efficient low velocity, high volume airflow design. This unique design ensures faster temperature pull down of warm product, colder holding temperatures and faster recovery in high use situations.
- Bottom mounted condensing unit positioned for easy maintenance. "No stoop" lower shelf maximizes visibility by raising merchandised product to higher level.

CABINET CONSTRUCTION

- Exterior non-peel or chip black laminated vinyl; durable and permanent.
- Interior attractive, NSF approved, white aluminum liner with stainless steel floor.
- Insulation entire cabinet structure is foamedin-place using Ecomate. A high density, polyurethane insulation that has zero ozone depletion potential (ODP) and zero global warming potential (GWP).

- Welded, heavy duty steel frame rail, black powder coated for corrosion protection.
- Frame rail fitted with leg levelers.
- Illuminated exterior sign panel. Variety of sign options available.

DOORS

- "Low-E", double pane thermal insulated glass door assemblies with mitered plastic channel frames. The latest in energy efficient technology.
- Each door fitted with 12" (305 mm) long handle.
- Self closing doors. Counter-balanced weight system for smooth, even, positive closing.

SHELVING

- Eight (8) adjustable, heavy duty PVC coated wire shelves 22^{15/6}"L x 20^{9/6}"D (583 mm x 523 mm). Four (4) chrome plated shelf clips included per shelf.
- Shelf support pilasters made of same material as cabinet interior; shelves are adjustable on ½" (13 mm) increments.

LIGHTING

• LED interior lighting provides more even lighting throughout the cabinet. Safety shielded.

MODEL FEATURES

- Evaporator is epoxy coated to eliminate the potential of corrosion.
- See our website www.truemfg.com for latest color and sign offerings.
- Convenient clean-out drain built in cabinet floor.
- Listed under NSF-7 for the storage and/or display of packaged or bottled product.


ELECTRICAL

 Unit completely pre-wired at factory and ready for final connection to a 115/60/1 phase, 15 amp dedicated outlet. Cord and plug set included.

115/60/1 NEMA-5-15R

OPTIONAL FEATURES/ACCESSORIES

- Upcharge and lead times may apply.
- 230 240V / 50 Hz.
- White exterior.
- □ Stainless steel exterior.
- Black aluminum interior liner with black shelving.
- General Stainless steel interior liner.
- G" (153 mm) standard legs.
- G" (153 mm) seismic/flanged legs.
- □ 2¹/₂" (64 mm) diameter castors.
- 4" (102 mm) diameter castors.
- Red wine thermostat.
- □ White wine thermostat.
- Chocolate thermostat.
- Barrel lock (factory installed).
- Ratchet locks.
- Wine racks.
- Additional shelves.
- TrueFlex gravity feed organizers.

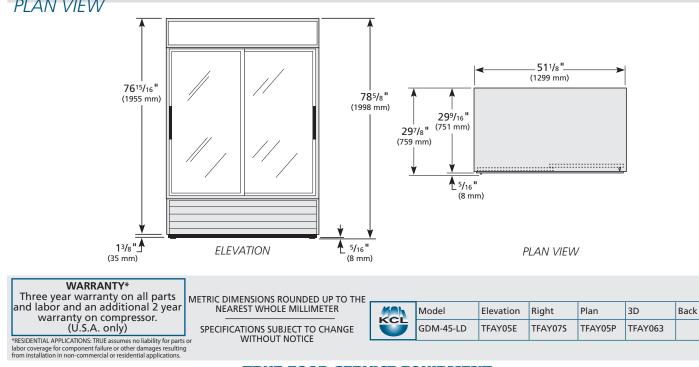

PLAN VIEW