

TRUE EUROPE

Field's End Road, Goldthorpe, Nr. Rotherham, South Yorkshire S63 9EU, UK www.truemfg.com • Tel +44 01709 888 080 • Fax +44 01709 880 838 Free Phone 0 800 783 2049 • Free Phone to U.S. 0 800 894 928

Model: TFP-48-18M-D-2-HC Food Prep Table:

Drawered Food Prep Unit with Hydrocarbon Refrigerant



Door or drawer assemblies can be located in any section of the cabinet. Location of door/drawers must be indicated at time of ordering.


TFP-48-18M-D-2-HC

natural refrigerant.

True's food prep units are designed with enduring quality that protects your long term investment.

2/16

- Factory engineered, self-contained, capillary tube system using environmentally friendly R290 hydro carbon refrigerant that has zero (0) ozone depletion potential (ODP), & three (3) global warming potential (GWP).
- Energy saving, environmentally friendly, exclusive forced-air refrigeration system holds 33°F to 41°F (.5°C to 5°C).
- All stainless steel front, top and ends. Matching aluminum finished back.
- Stainless steel, patented, foam insulated lid and hood keep pan temperatures colder, lock in freshness and minimize condensation. Removable for easy cleaning.
- Interior attractive, NSF approved, clear coated aluminum liner. Stainless steel floor with coved corners.
- 8" (204 mm) deep, ½" (13 mm) thick, full length removable cutting board included. Sanitary, high density, NSF approved white polyethylene provides tough preparation surface.
- Each drawer accommodates one (1) full size 12"L x 20"W x 6"D (305 mm x 508 mm x 153 mm) food pan & three (3) ½ size or six (6) ½ size & three (3) ½ size pans per drawer (sold separately). Drawer will support varying size pan configurations with available pan divider bars (drawer pans sold separately).
- Heavy-duty stainless steel drawer slides and rollers.
- Foamed-in-place using a high density, polyurethane insulation that has zero ozone depletion potential (ODP) and zero global warming potential (GWP).

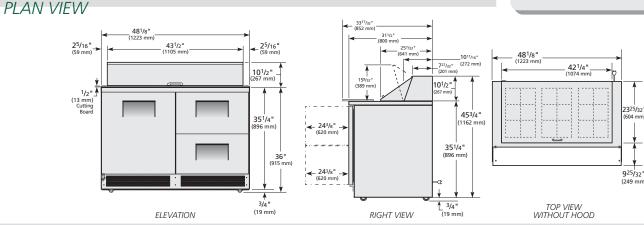

ROUGH-IN DATA

	Specifications subject to change without notice.
Chart dimensions rounded up to the next whol	le millimeter (inches rounded up to the next 1/8").

				Cabinet Dimensions (mm)						NEMA	Cord Length	Crated Weight
Model	Drawers	Doors	Shelves	W	D	Н	HP	Voltage	Amps	Config.	5	(kg)
TFP-48-18M-D-2-HC	2	1	2	1223	801	1181	1⁄3	230-240/50/1	2.5		2.13	207

† Depth does not include 51 mm for cutting board.

▲ Plug type varies by country.